

# S76

## Tubular motor operation

### APPLICATIONS

Commercial sites requiring medium to high security, for openings up to 29m<sup>2</sup>. See S76 Outboard motor (Datashheet 21) for larger sizes.  
Punched (V76) & Perforated (P76) slats can be incorporated as required for full or partial vision.

### CURTAIN SLAT

Single skin 76mm (3") curved steel, with a wall thickness of 0.7mm, 0.9mm or 1.2mm (dependent on overall shutter opening width).

Finish: Galvanised finish as standard. Plastisol and powder coating available on request (surcharge applies).

Visible Face: 76mm  
Weight per m<sup>2</sup>: 9.8kg (0.7mm thickness)  
12.5kg (0.9mm thickness)  
16.7kg (1.2mm thickness)

Maximum Width: 7000mm  
Maximum Area: 29m<sup>2</sup>

### CASING

Galvanised steel casing & end plates as standard. Optional fascia / custom design casings available on request (surcharge applies).  
N.B. Reveal fix installations are supplied with a fascia as standard.

Aluminium box also available (see Datashheet 22).

Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm)	Plate Size (mm)
2695	305
4000	355
4500	400

Plate sizes shown as a guide only and may vary.

### BOTTOM RAIL

'L' or 'T' shaped bottom rail.

### GUIDE CHANNELS

Galvanised steel guide channels. Width of 50mm, 65mm, 75mm or 100mm dependent on application. Windlocking guides and slat ends available.


Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour (surcharge applies).

### OPERATION

Electric: Tubular motor with internal rocker or external key switch as standard & safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Numerous control option variants such as group, remote or mobile phone activation.

Outboard motor and manual operation also available for the S76 - see appropriate datashheets.

CE Compliant to all applicable directives and regulations.

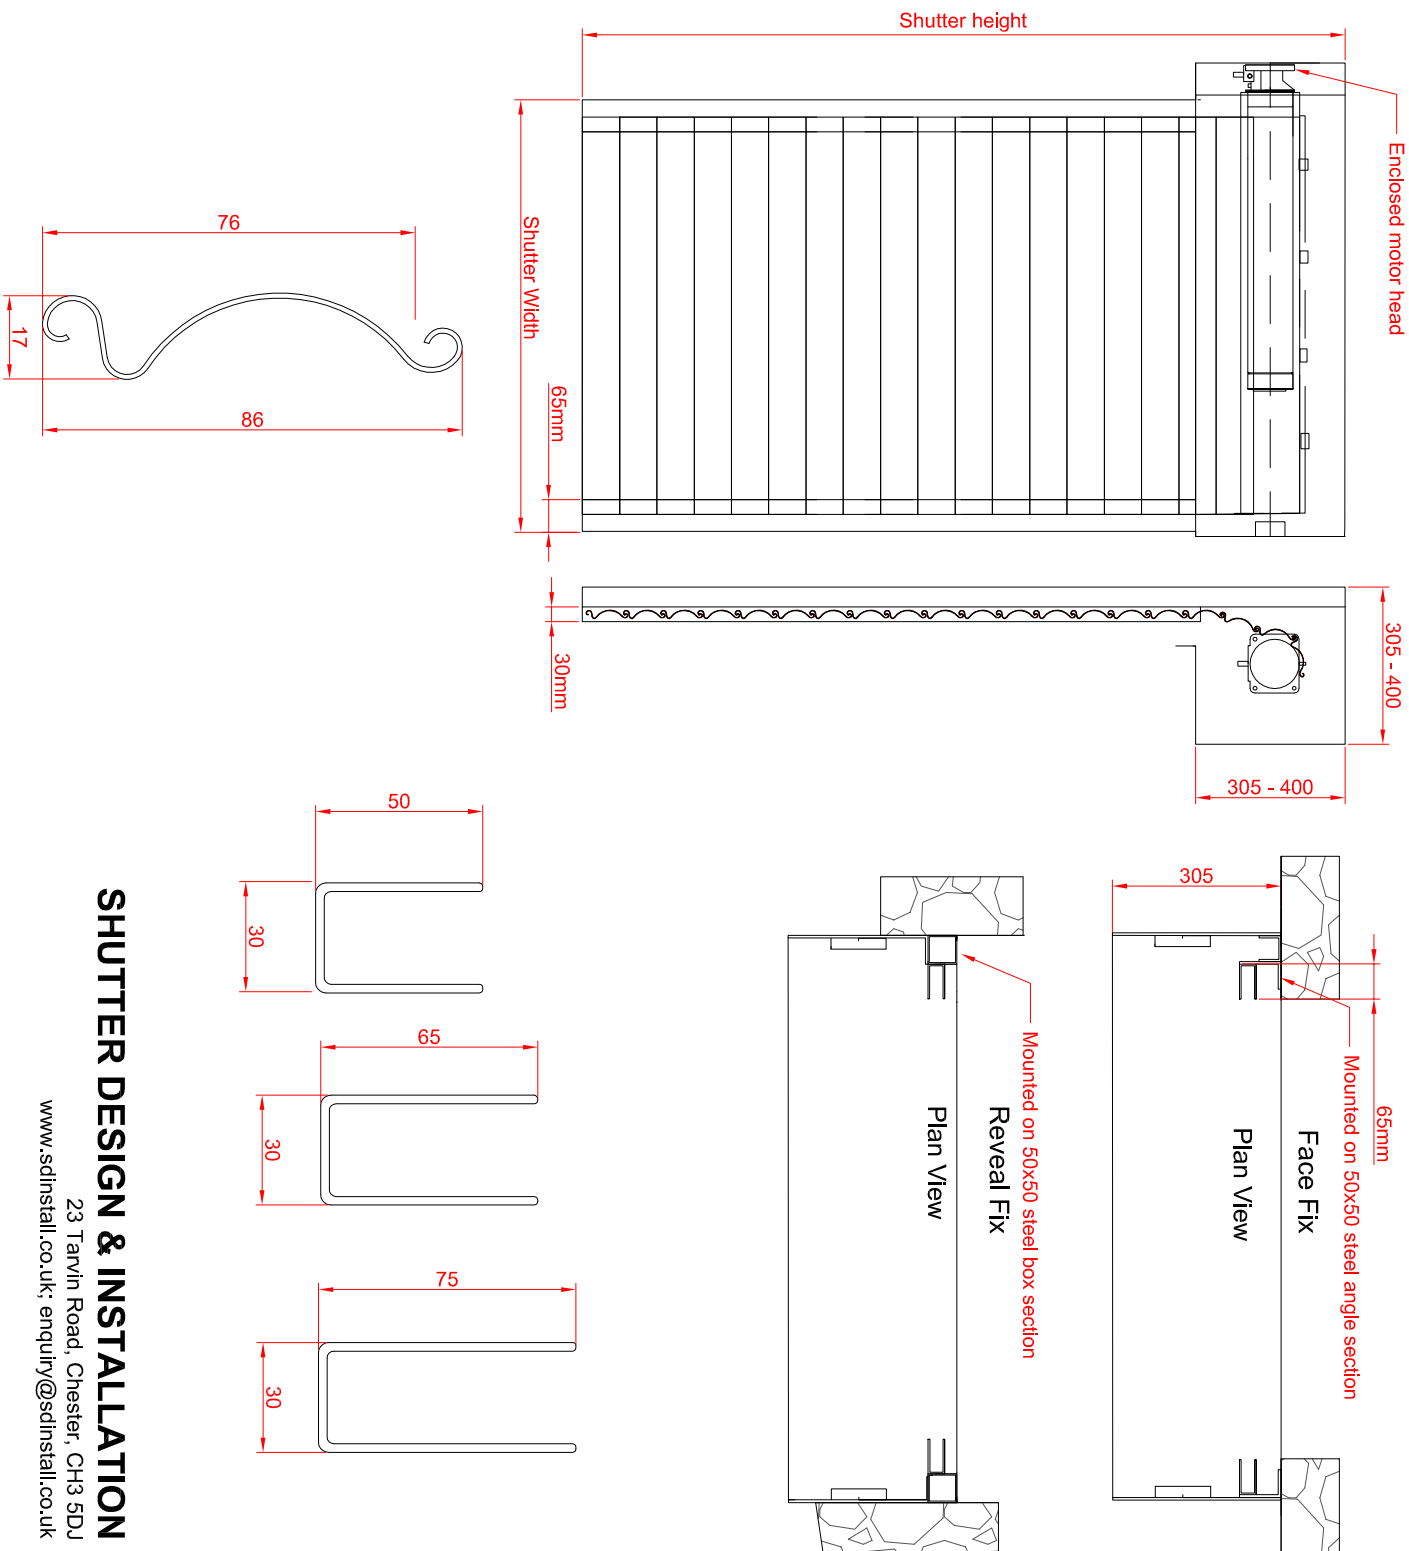

## SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DU  
www.sdinstall.co.uk; enquiry@sdinstall.co.uk