

V37 & P37 Security Shutter

APPLICATIONS

Domestic and commercial sites, up to 12m². The V37 (vision profile) and P37 (perforated) rolling shutters are a robust and lightweight barrier concealed within a compact enclosure when fully open. The shutter range is ideal for window openings and pedestrian door entrances, either internally or externally mounted.

Solid (E37), punched and perforated profiles can be combined to offer partial or full vision as required.

CURTAIN SLAT

Double-skinned extruded aluminium.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

Visible Face: 37.5mm

Weight per m²: 5.6kg (V37)

Maximum Width: 5kg (P37)

Maximum Width: 4000mm (electric operation)

Maximum Area: 30000mm (manual operation)

Maximum Area: 12m² (electric operation)

Maximum Area: 9m² (manual operation)

ENCLOSURE

Roll-formed aluminium box with pressure-moulded aluminium alloy end plates. Circular box available in 165mm and 205mm sizes (surcharge applies). The Elite shutter has an extruded aluminium box when fitted externally.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm) Plate Size (mm)

1050 150

1535 165

1820 180

2795 205

3550 250

4700 300

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

GUIDE CHANNELS

Extruded aluminium guide channels with brush inserts. Width of 25mm, 45mm, 53mm, 60mm HD or 66mm. Self-packing and circular surface guides available on request.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

OPERATION


Electric: Somfy tubular motor & internal rocker or external key switch as standard. Safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Numerous control option variants such as group, remote or mobile phone activation.

Manual Cord Belt: A swivel winder coils a belt attached to the rotating shutter barrel.

Manual Rod & Crank: Geared rod and crank handle winds the shutter.

Manual Spring & Lock: A counter-balanced spring assembly with a key-lock bottom slat & handles.

CE compliant to all applicable directives and standards.

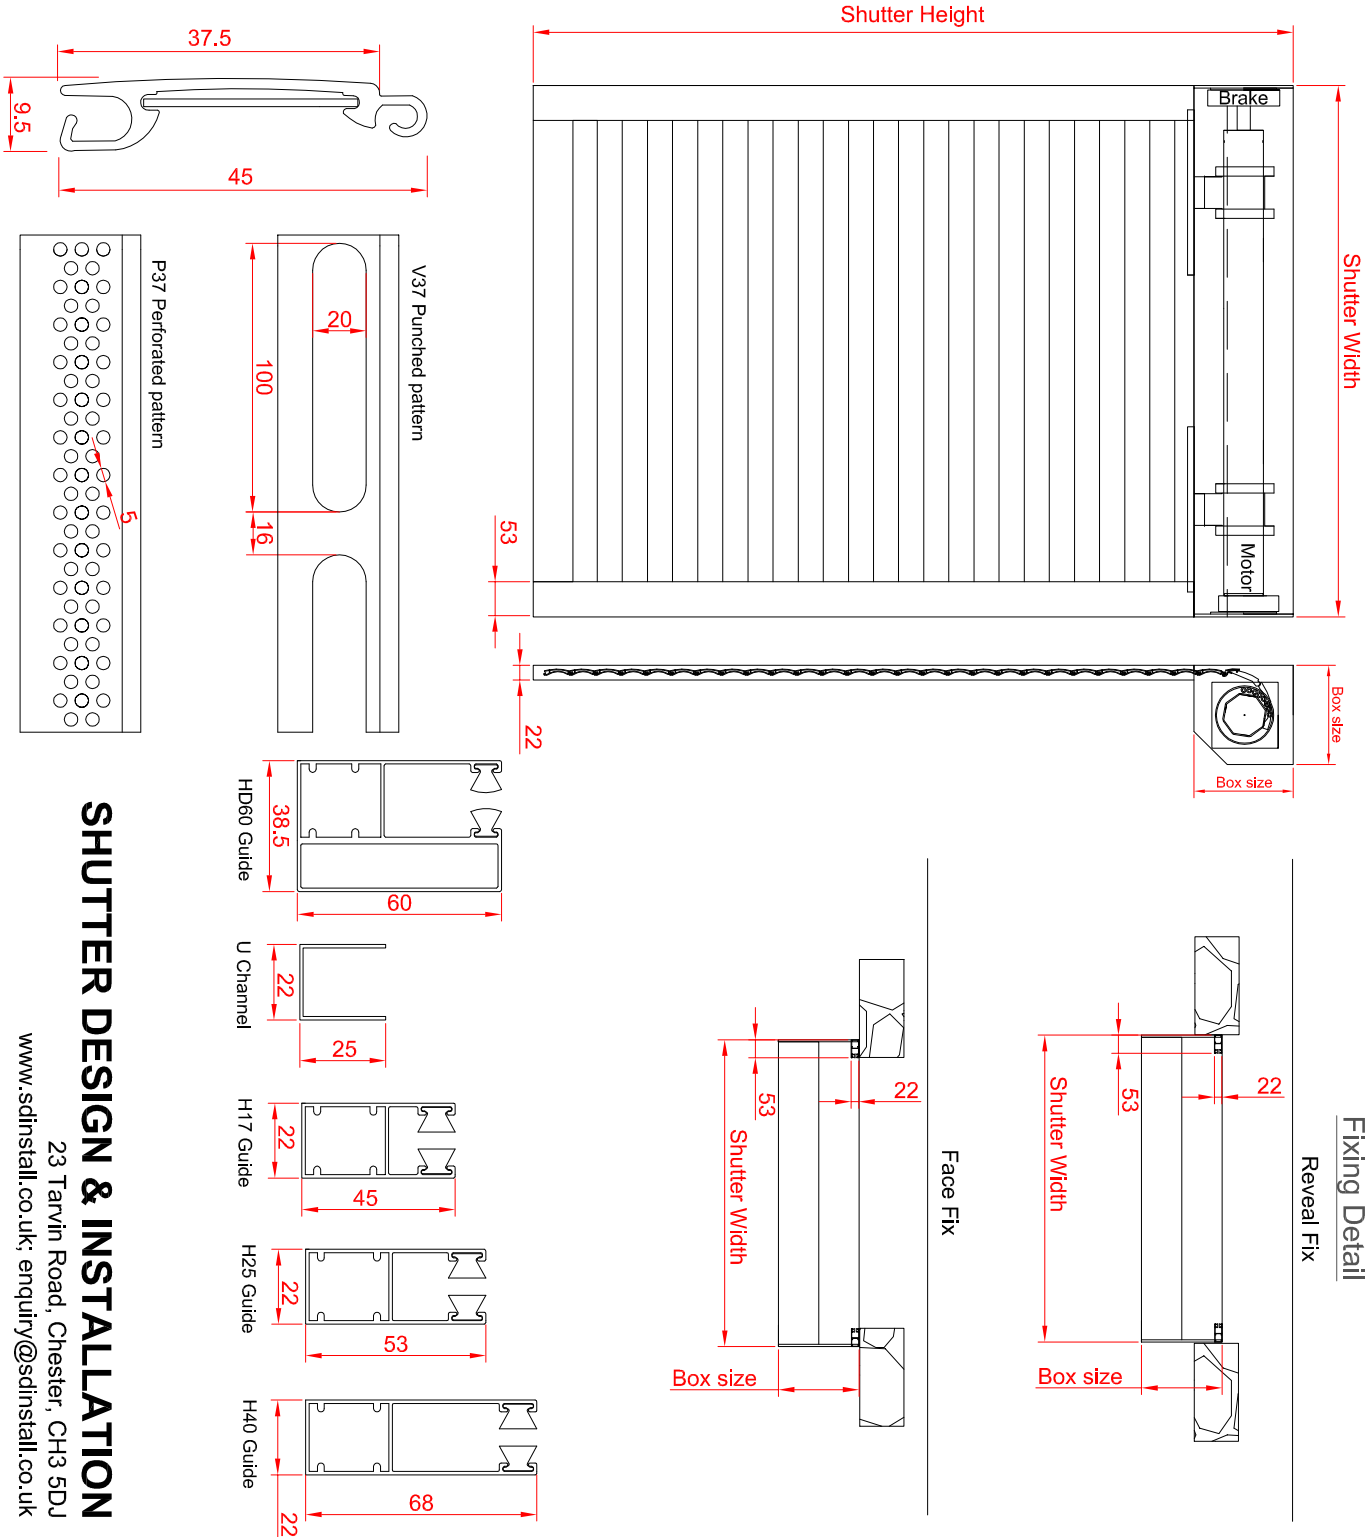

SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DJ
www.sdininstall.co.uk; enquiry@sdinstall.co.uk