

V76

APPLICATIONS

Commercial and industrial openings up to 50m². The V76 offers full or partial vision of 32% see-through visibility while retaining the durability and security of a regular solid shutter curtain. Solid slats can be incorporated as required.

CURTAIN SLAT

Single skin 76mm (3") curved steel with punched sections for vision. Wall thickness 0.7mm, 0.9mm, or 1.2mm, depending on overall opening width.

Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour or to choose from a range of plastisol finishes (surcharges apply).

Visible Face: 76mm  
Weight per m²: 8.3kg (0.7mm thickness)  
10.6kg (0.9mm thickness)  
14.2kg (1.2mm thickness)

Maximum Width: 12000mm  
Maximum Area: 29m² (tubular), 49m² (outboard)

CASING

Galvanised steel casing & end plates as standard. Optional fascia / custom design casings available on request (surcharge applies). N.B. Reveal fix installations are supplied with a fascia as standard.

Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm)	Plate Size (mm)	Motor
2695	305	Tubular
4000	355	Tubular
5000	400	Tubular
2200	305	Outboard
3650	355	Outboard
6000	400	Outboard

Plate sizes shown as a guide only and may vary. These sizes apply to standard shutter roll methods only.


GUIDE CHANNELS

Galvanised steel with a width of 50mm, 65mm, 75mm or 100mm. Windlock version available.

Finish: Galvanised finish as standard. Option to powder coat any RAL / BS colour (surcharge applies).  
BOTTOM RAIL  
Galvanised steel 'L' or 'T' shaped bottom rail.

OPERATION

Electric, Tubular: Tubular motor with internal rocker or external key switch as standard & safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies).  
Electric, Outboard: Three phase motors with safety brake, chain manual override & TS959 push button control station as standard. Both tubular & outboard motors have numerous control option variants such as group, remote or mobile phone activation.  
CE compliant to all applicable regulations and directives.

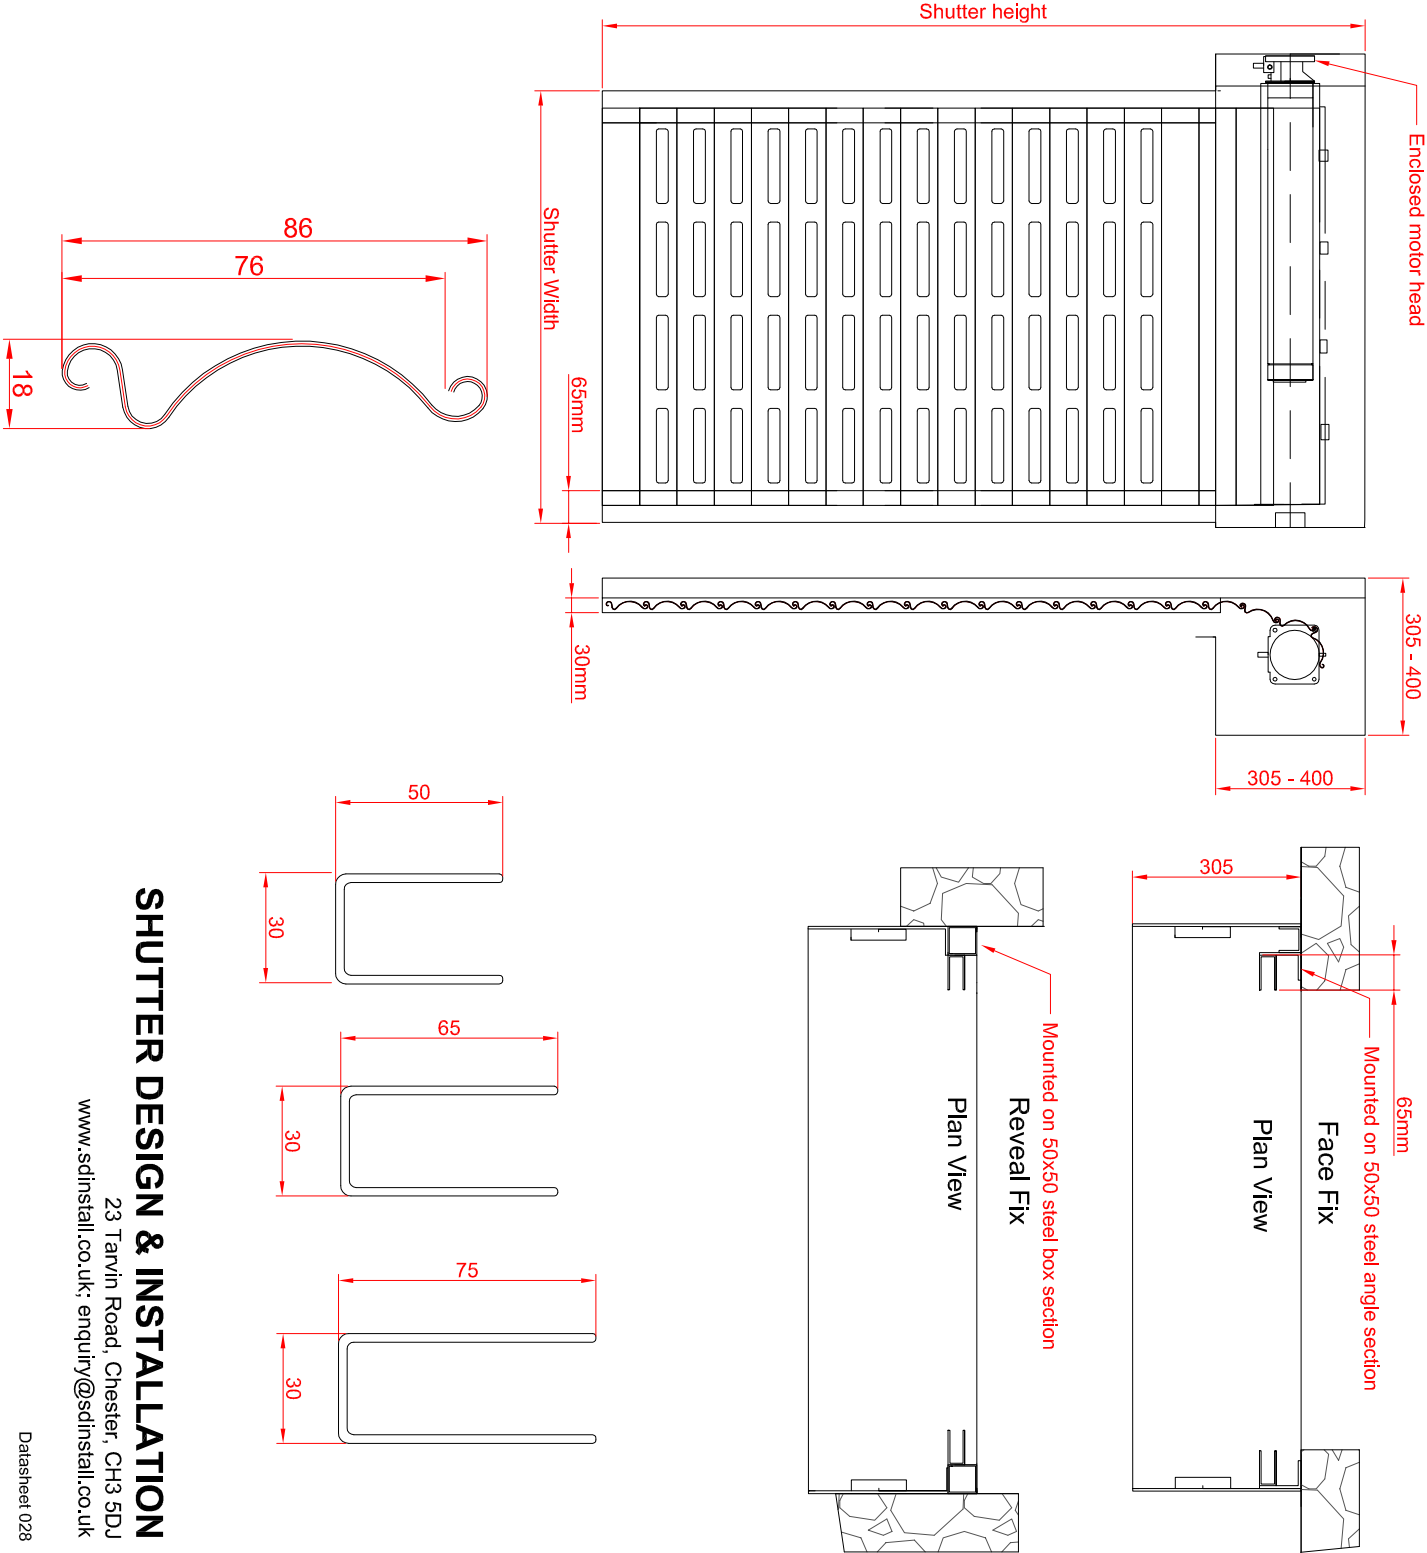

SHUTTER DESIGN & INSTALLATION

23 Tarrin Road, Chester, CH3 5DJ  
www.sdcinstall.co.uk; enquiry@sdinstall.co.uk