

P77

APPLICATIONS

Commercial sites & shop front applications up to 25m². The P77 perforated vision profile shutter affords 22% see-through vision with the solid security and aesthetic impact of standard aluminium shutters. Suitable for internal or external face or reveal fit.

CURTAIN SLAT

Double-skinned extruded aluminium with perforations.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

Visible Face: 77mm
Weight per m²: 8.8kg
Maximum Width: 6500mm
Maximum Area: 25m²

ENCLOSURE

Manufactured from roll-formed aluminium with pressure-moulded aluminium alloy end plates.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

Guide Height (mm) Plate Size (mm)

1650 250
2600 300
4640 360

Plate sizes shown as a guide only and may vary.

BOTTOM SLAT

Extruded aluminium bottom slat with rubber weather seal.

GUIDE CHANNELS



Extruded aluminium with brush inserts. Width of 70mm, 90mm or 150mm.

Finish: White or Brown. Option to powder coat any RAL / BS colour (surcharge applies).

OPERATION


Electric: Somfy tubular motor & internal rocker or external key switch as standard. Safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies). Numerous control option variants such as group, remote or mobile phone activation.

Note: Manual operation is available but not common for the V77 as the shutter tends to be used to cover larger openings. CE compliant to all applicable directives and standards.

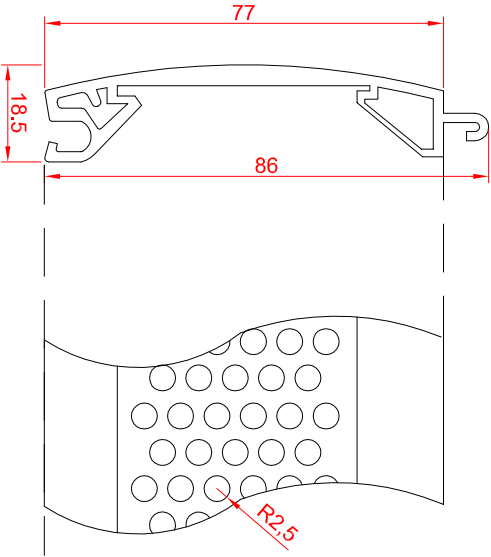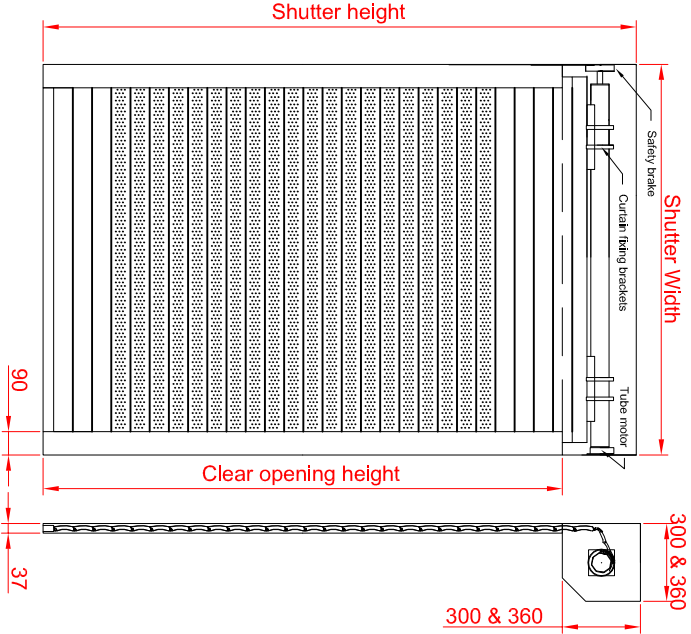



Face Fix

Plan View

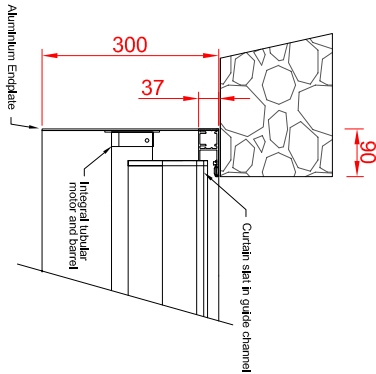

Reveal Fix

Plan View

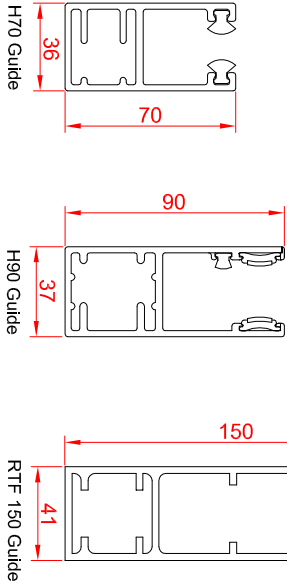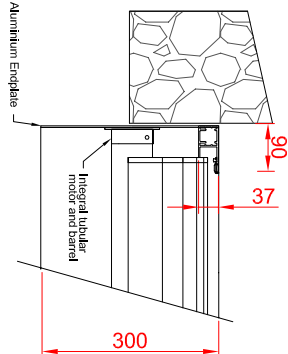

SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DU
www.sdinstall.co.uk; enquiry@sdinstall.co.uk