

Tube & Link (Aluminium housing)

APPLICATIONS

Medium security commercial sites where see-through vision is a priority. The Tube & Link offers high visibility and can be used internally behind glass for shop displays, or as a standalone security barrier. Suitable for internal or external face or reveal fit.

GRILLE

Brick formation as standard, utilising 13mm diameter tubes enclosing 8mm steel rods. Vertical lattice links create 56mm high openings (lower/higher available on request), enabling 75% transparency.

Finish: Anodised aluminium, mill finish or powder coated.

Weight per m²: 9kg
Maximum Width: 6000mm
Maximum Area: 20m²

HOUSING

Roll-formed aluminium with aluminium alloy end plates.

Finish: White or Brown, or powder coated to match powder coated grille (surcharge applies).

Steel housing also available (see datasheet 19).

Guide Height (mm)	Plate Size (mm)
1850	250
2700	300
4150	360

Plate sizes shown as a guide only and may vary.

BOTTOM RAIL

Steel 'L' or 'T' shaped bottom rail.

GUIDE CHANNELS


Extruded aluminium guide channels with brush inserts. Width of 75mm.

Finish: White or Brown, or powder coated to match powder coated grille.


OPERATION

Electric: Tubular Motor = Tubular motor with internal rocker or external key switch as standard & safety brake as appropriate to comply with legislation. Manual override facility & crank handle as required (surcharge applies).


CE Compliant to all applicable directives and regulations.

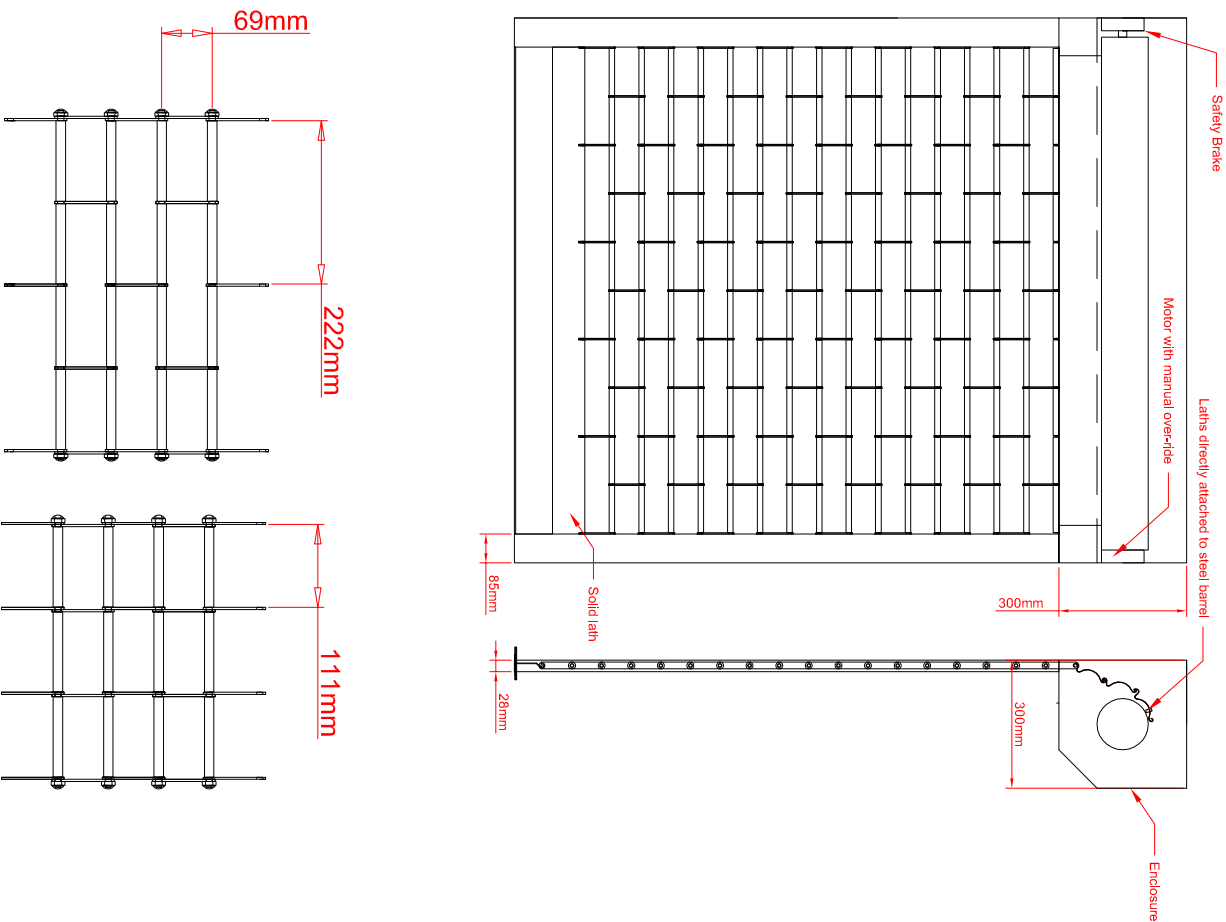

Fixing Detail

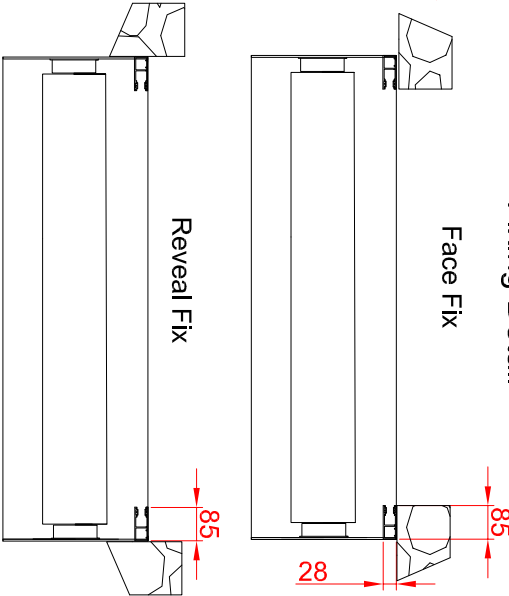

Diagrams show Single-Phase operation. Three-Phase drawing available on request.



85mm Aluminium Guides

SHUTTER DESIGN & INSTALLATION

23 Tarvin Road, Chester, CH3 5DJ
www.sdinstall.co.uk; enquiry@sdinstall.co.uk